




Glass roof system

Murano  
Integrale



Just  
*enjoy life!*

**Lewens**  
MARKISEN

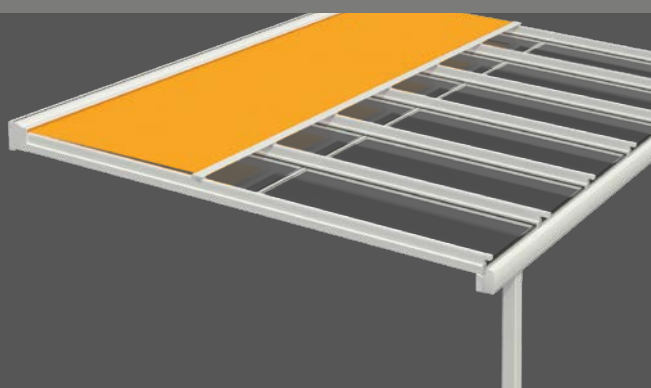



*Murano Integrale Overhang type  
with laterally flush posts  
(style Ü)*

## Murano Integrale – glass roof with awning

Optimal protection with integral sunshade



### Overhang type (Ü)


*with recessed posts*

*Here the posts can be positioned on the patio, for example, and the roof overhang extended beyond this. Rainwater is drained via a rain chain of stainless steel (standard) or optionally via downpipes.*



## Customised protection from the elements

- Width max. 700 cm, depth max. 500 cm
- With 2 to 3 posts *(depending on load and type)*
- Optional roof pitch: 3° to 20° (stepless)
- Cassette flush with wall

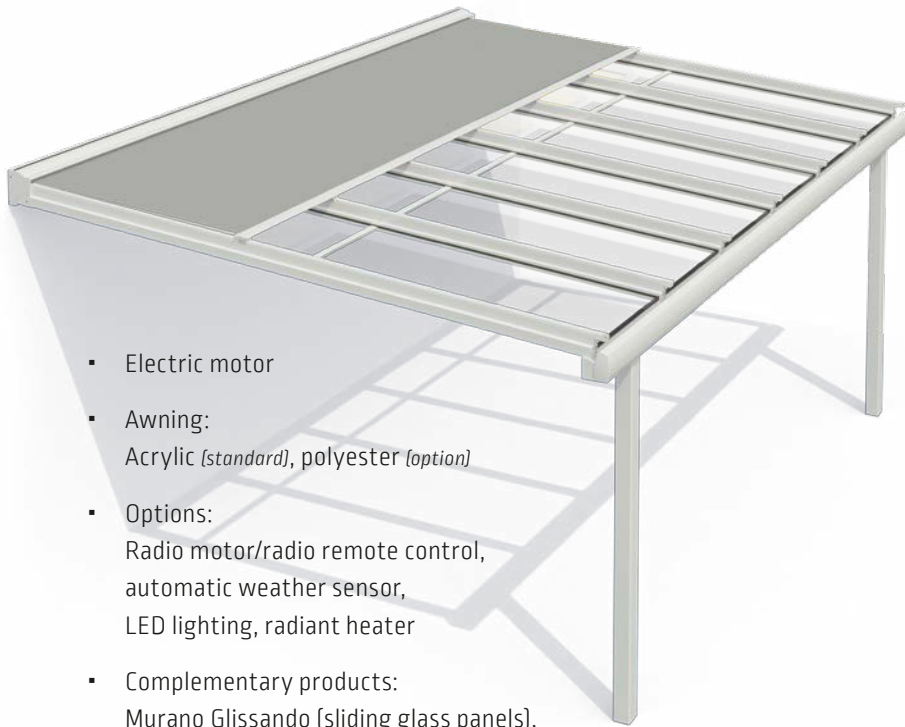

- Electric motor
- Awning:  
Acrylic *(standard)*, polyester *(option)*
- Options:  
Radio motor/radio remote control,  
automatic weather sensor,  
LED lighting, radiant heater
- Complementary products:  
Murano Glissando (sliding glass panels),  
Triangular infill,  
Murano Finestra (permanent glazing)



Murano Integrale offers variable shelter from the rain, the temperature and the sunlight. With an awning integrated into the wall profile, this model combines the transparency and protection of a glass roof with the advantages of a high-quality awning for adjustable shade from the sun. Various types and styles with posts in line with the front profile and flush or positioned inwards laterally are available to choose from, even for this generously proportioned glass roof.

*Flush type  
with laterally recessed posts  
(style B2).*



### Flush type (B)

*with front-facing posts*

*The posts are in line with the gutter for a compact, modern look. Rainwater is drained via the rafters, gutter and down the inside of the post.*




# Murano Integrale

Equipment and technical features



Manufactured and assembled in Germany  
TUV-tested safety  
Quality and technology CE-compliant

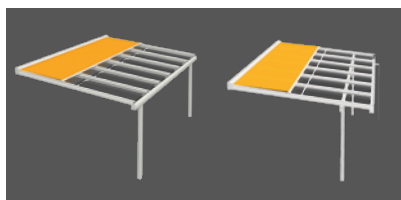


Styles	Flush (B) Type		Overhang (Ü) Type	
	B1, B2	B3	Ü1, Ü2, Ü3	
– Posts laterally external	B1		Ü1	
– Posts laterally recessed	B2		Ü2	
– with 3rd support	B3		Ü3	
– Overhang (inner edge of post – outer edge of gutter)	–		30 - 100 cm	
– Reinforcement: steel (s)	...s		...s	
<b>Dimensions (max.)</b>				
Width, 1 unit (single field)	700 cm		700 cm	
Depth (type B: to inner edge of post; type Ü: to outer edge of gutter)	500 cm		500 cm	
Pitch angle, stepless (at least 5° recommended)	3° - 20°		3° - 20°	
Rafter spacings (max., depending on type, roof size, load)	120 cm		120 cm	
Post height (max., standard 240 cm)	350 cm		350 cm	
<b>Rainwater drainage</b>				
Downpipe integrated into post	■		–	
Downpipe, external in front of post	–		□	
Rain chain + water spout (1 of each)	–		■	
<b>Glazing</b>				
for laminated safety glass (LSG, clear) or twin-wall sheets	!		!	
<b>Drive</b>				
Electric motor (for wall switch)	■		■	
Radio motor (io or RTS)	□		□	
<b>Frame colours</b>				
17 RAL colours + 6 textured finishes (Lewens standard colours)	■		■	
Additional RAL, special colours and effect finishes	□		□	
<b>Awning fabrics from the LEWENS collection</b>				
Branded acrylic (spun-dyed, ultra fade resistant)	■		■	
Branded polyester (spun-dyed, ultra fade resistant)	□		□	
Tenara quality sewing yarn	■		■	
Corner reinforcement and lateral seam (10 cm)	■		■	
<b>Options</b>				
Radio motor + radio remote control (io or RTS)	□		□	
Automatic weather sensor (sun, wind, rain)	□		□	
Lighting - LED strips, LED spot bar	□		□	
Radiant heater (only wall attachment)	□		□	
Glass joint	□		□	
Additional rain chain/water spout or downpipe	□		□	
Lateral connection profile/various profiles	□		□	
Support frame	□		□	

Possible dimensions and restrictions along with the complete range of electronic accessories can be found in the technical data in the current Lewens price list.


■ Standard □ Option  
– not available  
! Not included in scope of supply

## Types and styles


**B1** flush, external  
**B1s** as B1, with steel reinforcement




**B2** flush, laterally recessed  
**B2s** as B2, with steel reinforcement




**B3** as B1, with 3<sup>rd</sup> support  
**B3s** as B3, with steel reinforcement




**Ü1** rafter overhang, external  
**Ü1s** as Ü1, with steel reinforcement



**Ü2** rafter overhang, laterally recessed  
**Ü2s** as Ü2, with steel reinforcement



**Ü3** as Ü1, with 3<sup>rd</sup> support  
**Ü3s** as Ü3, with steel reinforcement



Your stockist will be happy to advise you:

**Lewens**  
MARKISEN



www.lewens-markisen.de

Subject to technical alterations. Date: 04/2020