




Rail system
Pergola



Portofino
Pergola

Just
enjoy life!

Lewens
MARKISEN

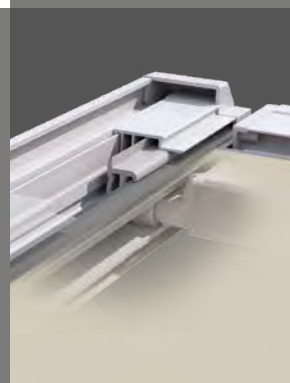

GDA
GESAMTVERBAND DER
ALUMINIUMINDUSTRIE e.V.
Aluminium-Profil-Award

GERMAN
DESIGN
AWARD
2022

if
DESIGN
AWARD
2022




Portofino Pergola type

An exciting and versatile performer



When the sun is low in the sky, the optional **Vario valance** offers a sunshade and privacy screen that can be adjusted as required.

Height-adjustable **Vario uprights** (option) offer variable shade and facilitate instant run-off during light showers.

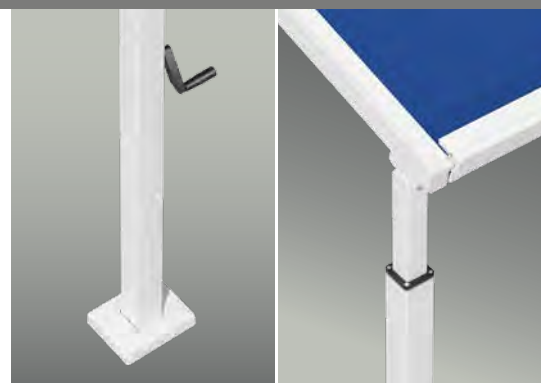


Equipment and convenience features

- Width, 1 unit max. 600 cm, double unit max. 1200 cm, drop max. 500 cm
- Zip guide and patented balance spring technology
- Electric motor
- Options:
Radio motor/radio remote control, automatic weather sensor, LED lighting (with transformer integrated in casing), radiant heater, Vario valance, Vario uprights




As a patio awning with free-standing uprights, the Portofino type pergola is a particularly windproof sunshade model. Thanks to its closed zip guide, the awning is always perfectly tensioned, offering good looks teamed with complete shade from the sun. For greater flexibility and comfort on the patio, the Portofino also comes with Vario uprights, enabling the front corners to be lowered for variable shade and relaxed, highly indulgent outdoor living.

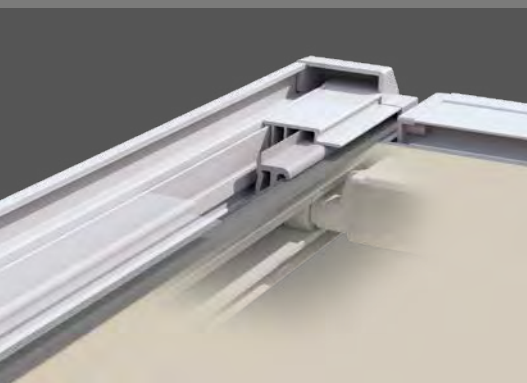


Fabric guide **ZIP**

The track systems, which have received recognition with the GDA Aluminium Profile Award, are equipped with a zip guide and patented balance spring technology. These ensure a taut sit of the fabric, greater wind safety and complete shade from the sun.

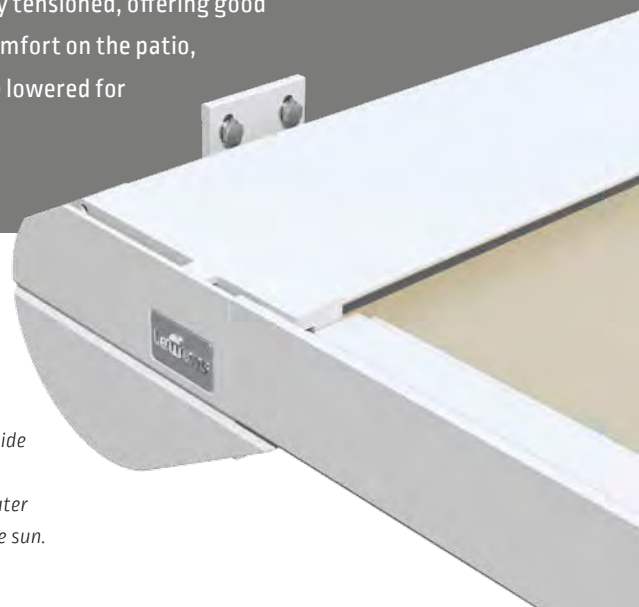

Portofino

Equipment and technical features



Manufactured and assembled
in Germany



Quality and technology
CE-compliant



Recipient of the
GDA Aluminium Profile Award

Recipient of the



Recipient of the



Type	Pergola
Fabric guide	ZIP
System height	152 mm
Upright height <i>(for adjustment on site)</i>	250 cm ■
Special upright heights	<input type="checkbox"/>
Unit widths <i>(max.)</i>	
1 unit <i>(single field)</i>	600 cm
2 part <i>(double unit: 2 cassettes, 2 motors, 4 guide rails, 3 uprights)</i>	1.200 cm
Drop <i>(max.)</i>	
Depth <i>(incl. cassette, on Capri plus 11 cm return roller)</i>	500 cm
Upright distance from wall <i>(max.)</i>	400 cm
Upright recess at front <i>(max., depends on unit depth!)</i>	100 cm
Drive	
Electric motor (for wall switch)	■
Radio motor (io)	<input type="checkbox"/>
Frame colours	
17 RAL colours + 6 textured finishes <i>(Lewens standard colours)</i>	■
Additional RAL, special colours and effect finishes	<input type="checkbox"/>
Awning fabrics <i>from the LEWENS collection</i>	
Branded acrylic <i>(spun-dyed, ultra fade resistant)</i>	■
Branded polyester <i>(spun-dyed, ultra fade resistant)</i>	<input type="checkbox"/>
Tenara quality sewing yarn	■
Options	
1 Radio motor + radio remote control (io)	<input type="checkbox"/>
2 Automatic weather sensor (sund,wind, rain)	<input type="checkbox"/>
3 Lighting - integral LED strip, LED profile	<input type="checkbox"/>
4 Radiant heater <i>(only wall attachment)</i>	<input type="checkbox"/>
5 Vario valance	<input type="checkbox"/>
6 Vario upright(s), upright lowers by max. 30 cm, crank drive	<input type="checkbox"/>
7 Additional fabric support	<input type="checkbox"/>
Attachment	
Wall attachment + 2 front uprights <i>(wall brackets, base consoles included)</i>	■
additional/further attachment materials	<input type="checkbox"/>
Note	

Due to the design and the weight of the awning fabric, the fabric may sag in the middle on large awning sizes. However, this has no effect on the operation and / or service life of the awning.

■ Standard □ Option

Possible dimensions and restrictions along with the complete range of electronic accessories can be found in the technical data in the current Lewens price list.

Your stockist will be happy to advise you:



www.lewens-markisen.de

Subject to technical alterations. Date: 04/2022